

<b>Models: KR</b>	<b>Category: Non - Capacity Type Solenoid Pump</b> <b>Application: Oil Series</b> <b>Classification: Flow (Plunger) Type</b>
-------------------	--

**FEATURES:**

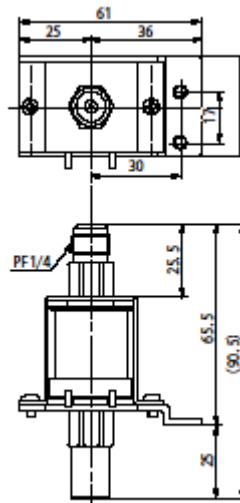
- These Non - Capacity Type solenoid pump models are designed to function even with large suction heads in oil applications. In fact, these pumps can lift up to 6 L / h with a suction head of 2 M.

**PRIMARY APPLICATIONS:**

- Used to transfer oil from a tank that is a considerable distance below the pump.


**SPECIFICATIONS:**

SPECIFICATIONS	MODELS	KR6Y
<b>Power Sources</b>		120 / 230VAC (50 / 60Hz) [Half-Wave Rectifier is Required]
<b>Power Consumption (Typical)</b>		11 VA
<b>Maximum Free Flow Rate</b>		< 4.8 L / h (< 1.27 gal / h)
<b>Maximum Pressure (No Flow)</b>		40 kPa (5.7 psi)
<b>Suction Level</b>		< 1.8 M (< 5.9 ft)
<b>Operating Temperature</b>		-20 ° C ~ 40 ° C (-4 ° F ~ 104 ° F)
<b>Mounting Thread</b>		Please Refer to the Diagrams Appearing Below
<b>Piping Connection Sizes</b>		Please Refer to the Diagrams Appearing Below
<b>Weight</b>		200 g (7.05 oz)


**Nippon Control Kogyo Co., Ltd. Sales Dep.**

5-1-16 Chiyoda, Sakado, Saitama. 3500214 JAPAN

 TEL: 81.49.283.7711 FAX: 81.49.283.7717 E-mail: inquiry@nipcon.co.jp URL: <http://www.nipcon.co.jp>